

Notice

This manual provides general information, preparation for use, installation and operating instructions for the Black Lion Audio PG-1 Type F mkii Power Conditioner.

The information contained in this manual is subject to change without notice. Black Lion Audio makes no warranties of any kind with regard to this manual, including, but not limited to, the implied warranties of merchantability and fitness for a particular purpose. Black Lion Audio shall not be liable for errors contained herein or direct, indirect, special, incidental, or consequential damages in connection with the furnishing, performance, or use of this material.

©2025 Black Lion Audio. The Black Lion Audio 'Lion Face' logo, BLA, PG-1 are trademarks or registered trademarks of Black Lion Audio. This manual and any associated intellectual property are subject to copyright protection. No part of this document may be reproduced in any form without explicit written consent from Black Lion Audio.

RAD Distribution


180 Carpenter Ave.
Middletown, NY 10940

Revised 05-29-25



PG-1 Type F mkii

Studio-grade power conditioner
and surge protector

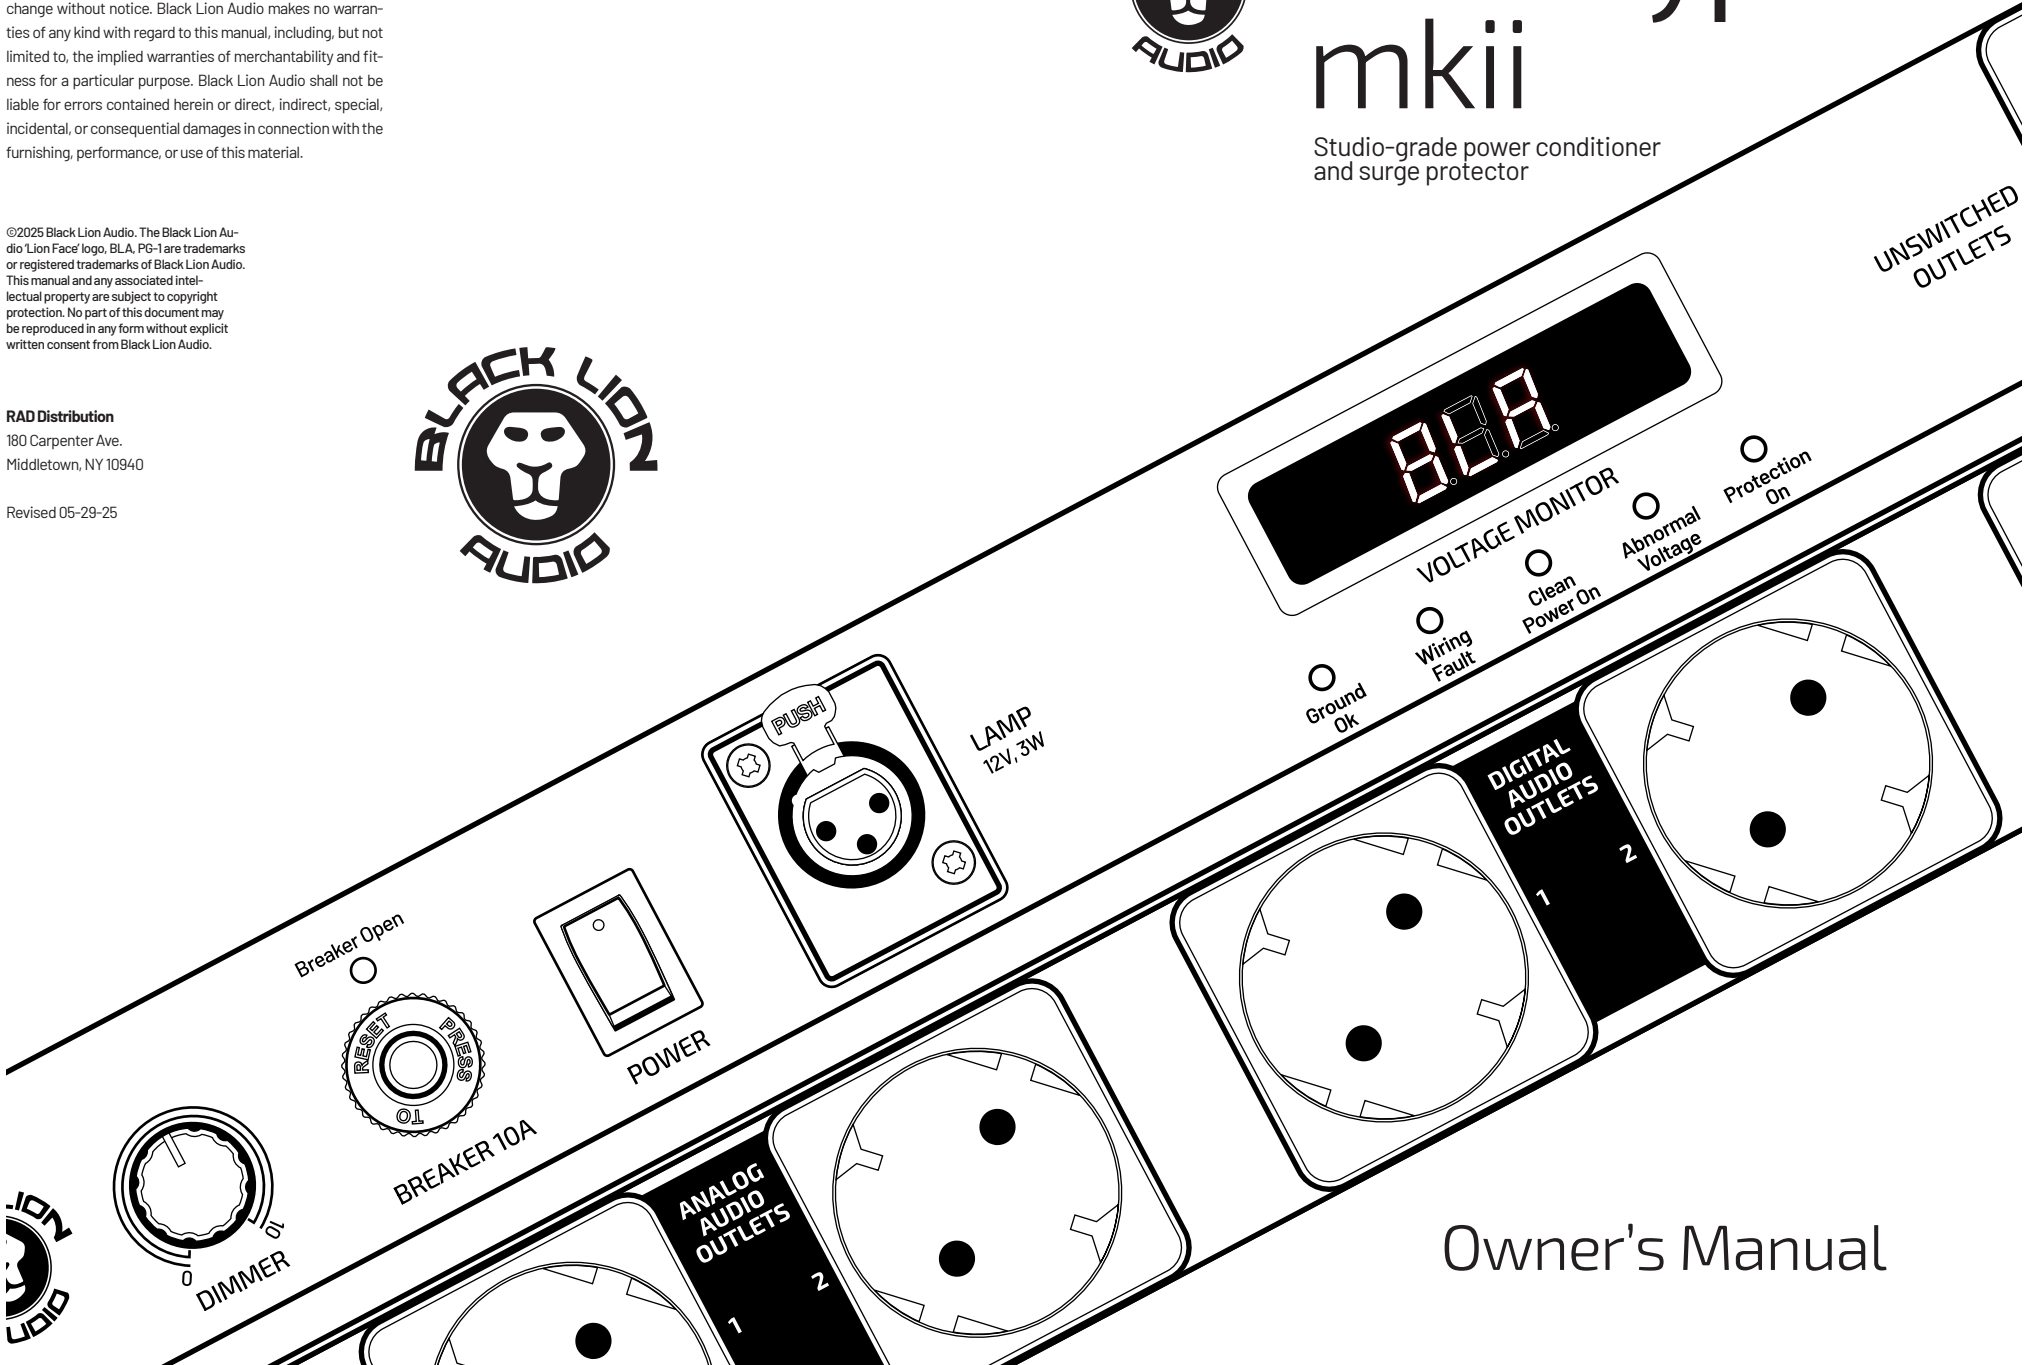

Owner's Manual

IMPORTANT SAFETY INSTRUCTIONS

- 1. Read these instructions.
- 2. Keep these instructions
- 3. Heed all warnings.
- 4. Follow all instructions.
- 5. Do not use this apparatus near water.
- 6. Clean only with dry cloth.
- 7. Install in accordance with the manufacturer's instructions.
- 8. Do not install near any heat sources such as radiators, heat registers, stoves, or other apparatus that produce heat.
- 9. Protect the power cord from being walked on or pinched particularly at plugs, convenience receptacles, and the point where they exit from the apparatus. If the power cord becomes frayed, stop using immediately.
- 10. Use only attachments/accessories specified by the manufacturer
- 11. Use only with a cart, stand, tripod, bracket or table specified by the manufacturer, or sold with the apparatus. When a cart is used, use caution when moving the cart/apparatus combination to avoid injury from tip-over.
- 12. Unplug this apparatus during lightning storms or when unused for long periods of time.
- 13. Refer all servicing to qualified service personnel. Servicing is required when the apparatus has been damaged in any way, such as power supply cord or plug is damaged, liquid has been spilled or objects have fallen into the apparatus, the apparatus has been exposed to rain or moisture, does not operate normally, or has been dropped.
- 14. This apparatus shall not be exposed to dripping or splashing, and no object filled with liquids, such as vases, shall be placed on the apparatus.
- 15. Note that this apparatus is not completely disconnected from the AC mains service when the power switch is in the OFF position.
- 16. The mains plug or power inlet on the product is used as the disconnect device, so the disconnected device shall remain readily operable when reconnected.
- 17. Any changes or modifications not expressly approved in this manual could void your authority to operate this apparatus.

IMPORTANT!

Please use the correct fuse designated on the rear panel before plugging in the power cord. Improper selection can result in damage to the unit that will not be covered under the warranty.

The lightning flash with an arrowhead symbol within an equilateral triangle is intended to alert the user to the presence of uninsulated "dangerous voltage" within the product's enclosure that may be of sufficient magnitude to constitute a risk of electric shock to persons.



The exclamation point within an equilateral triangle is intended to alert the user to the presence of important operating and maintenance (servicing) instructions in the literature accompanying the product.



The Black Lion Audio PG-1 Type F mkii complies with all applicable / RoHS/ WEEE European Union directives.

Do not attempt to service this unit yourself, as it will void your warranty. Please check your unit carefully upon receipt and return to place of purchase immediately if there are any problems with the product. After that, the standard Black Lion Audio 3 YEAR warranty will apply to defects in materials and workmanship.

SERVICE

For service or warranty assistance, please contact the Black Lion Audio distributor in your country through the dealer from whom you purchased this product.

LIMITED 2-YEAR WARRANTY

Black Lion Audio's PG-1 Type F mkii is warranted by Black Lion Audio to be free from defects in materials and workmanship for the period of TWO (2) YEARS to the original purchaser. In the event of such defects, the product will be repaired without charge or, at our option, replaced with a new one if delivered to Black Lion Audio prepaid, together with a copy of the sales slip or other proof of purchase date. The warranty excludes problems due to normal wear, abuse, shipping damage or failure to use the product in accordance with the specifications.

All parts and labor are covered under this Limited Warranty. However, if it is determined by Black Lion Audio that the device was damaged or made defective through abuse, we reserve the right to charge the customer for the cost of the repair.

Black Lion Audio shall not be liable for damages based upon inconvenience, loss of use of the product, loss of time, interrupted operation or commercial loss or any other damages, whether incidental, consequential or otherwise. This warranty gives you specific legal rights, and you may have other rights, which will vary from state to state.


This warranty is not transferable.

QUICK START GUIDE

Once you have installed your PG-1 Type F mkii where you need it, plug it in to an appropriate power source. If you are not sure your source is correct, consult with your local power company.

Plug in your equipment to the correct outlets on the PG-1 Type F mkii.

Turn on the power. The digital and analog outlets are switched with a delay sequence. The digital and analog outputs turn on with the power switch and turn off after a six second delay. The high current outputs turn on after six seconds and turn off with the power switch. This allows any startup sequences to be finished before the high current devices are turned on.

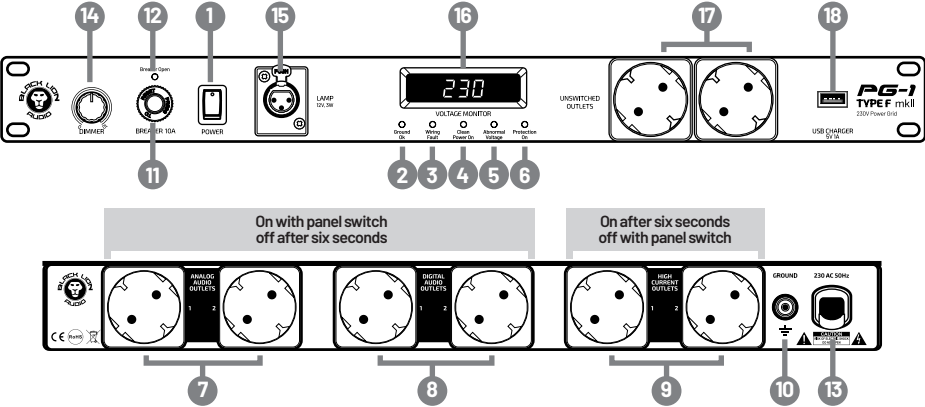

- 1. **ON/OFF Switch:** Once the PG-1 Type F mkii is plugged into a grounded 230VAC outlet, turning the front panel POWER switch to the ON position will sequentially power the components plugged into the rear panel outlets.
- 2. **GROUND OK:** When this is on, the PG-1 Type F mkii is plugged into a properly grounded power source. If the LED is not on, unplug the unit from the power source and correct the fault.
- 3. **Wiring Fault:** This indicates the LINE and NEUTRAL wires in the source are reversed. Unplug the unit immediately and consult an electrician to fix the fault.
- 4. **Clean Power On:** This LED indicates that the PG-1 Type F mkii is providing clean, beautiful AC power to all connected components.
- 5. **Abnormal Voltage:** When this LED is ON, the PG-1 Type F mkii is warning about under/over voltage (greater than 253 VAC or less than 207 VAC).
- 6. **Protection ON:** When this LED is on, the PG-1 Type F mkii's power surge circuitry is functioning correctly. If this LED is OFF, the circuit has malfunctioned. If it is OFF, unplug the unit immediately.
- 7. **Digital Filter (Switched) Outlets:** These outlets have a special filter designed to reduce AC supply interference to your digital components to reduce artifacts that increase jitter in digital convertors (workstations, digital effects, etc.). They also isolate the rest of your system from noise generated by the digital components themselves.
- 8. **Analog Audio Filter (Switched) Outlets:** These outlets have a special filter circuit that reduces audible noise in your analog components (mixers, dynamic effects, etc.)
- 9. **High Current Filter (Timed) Outlets:** These outlets have a special filter circuit designed to handle high current components like power amplifiers or Active Speakers.
- 10. **Gold-plated ground post:** Provides a connection point for any ungrounded components.

PHASING NOTICE

When connecting the Black Lion Audio PG-1 Type F mkii to 230V AC one must make sure that the phasing is correct. When the phasing is correct, the red "Wire Fault" light will remain off. Should the warning light glow red, reverse the phasing by removing the electric cable from the wall, turn the plug of the PG- 1 Type F mkii 180 degrees, and plug it back in.

If "Ground OK" does not light, reverse the phasing by removing the electric cable from the wall, turn the plug of the PG- 1 Type F mkii 180 degrees, and plug it back in.

- 11. **Thermal Circuit Breaker:** protects the PG-1 Type F mkii from power overload.
- 12. **Breaker Open:** When this LED is on, the thermal circuit breaker has tripped due to an overload. Before resetting the breaker, find the reason for the overload.
- 13. **Ultra-high Current AC Power Cable:** Integrated, high-power, heavy duty AC cable to maximize power transfer to high current components such as amplifiers.
- 14. **Dimmer:** This knob controls a flexible accessory light. Push on/off and turn clockwise for brightness.
- 15. **12V XLR Lamp Socket:** Provides 12VDC on PIN-2 to an accessory lamp.
- 16. **Numerical Display:** Three-character LED displays the line voltage at the source.
- 17. **Unswitched Convenience Outlets:** These are always-on unfiltered power outlets.
- 18. **USB Charger:** 5V/1A convenience charger for USB devices.

Note: For best performance we recommend plugging analog components into the analog outlets and digital to digital. It will not harm any components if they are plugged into any other outlet.

SPECIFICATIONS

Voltage	230 VAC 10A max
AC Mains Input	Schuko Type F Combination Plug
Dimensions	Width: 483 mm (19") Height: 44 mm (1U) Depth: 250 mm
Weight	4.2 kg